KM-530MAK

MODULAR CRESCENT CUBER

KM-530MAK
04/28/26
Item #13683K

Item #: _____

Project: _____

Qty: _____

AIA#: _____

W x D x H
30" x 24" x 22"

Air-Cooled
KM-530MAK

Air-cooled model shown on Lancer Dispenser

Air-cooled model shown on DB-200H Bin

Air-cooled model shown on BD-500SF

KM*Edge*™ Cube Dimensions*



* approximate size in inches, image not to scale

Features

- **Individual crescent cube**
- **Factory-installed ultrasonic bin control can be adjusted on site**
- **Environmentally friendly R290 hydrocarbon refrigerant**
- **Simple, one-hour cleaning process** CLEANASSIST

- Optimized for use with ice and beverage dispenser
- Durable construction with fewer parts
- Self-diagnostic programming automatically adjusts to changing conditions
- Snap fit parts for easy cleaning
- Stainless steel double-sided evaporator
- CycleSaver™ design
- EverCheck™ alert system
- Removable air filters (air-cooled model only)

Available on Bins:

B-250SF	BD-500SF**	B-800SF	B-1150SS	DB-130H
B-500SF	B-700SF	B-900SF	B-1300SS	DB-200H

*Top kit may be required. See bin spec sheets. **BD bins recommended*

Warranty:
3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator.
5 Year Parts on Compressor; air-cooled condenser coil.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 33.75" x 33.25" X 28" Volume: 18.18ft³

		ICE PRODUCTION		WATER USAGE		ELECTRICAL							
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F	90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
Air	KM-530MAK	545	424	25.0	N/A	5.3	20A	10.7A	115V/60/1	3	8,600	5.3 oz.	156 / 176

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104 - 127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters. (Air-cooled model only)
- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.

Plumbing

- Icemaker Water Supply Line: Min. 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Min. 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Accessories

- HS-2148, DB Top Kit
- HS-5562, Remote Monitoring System
- HS-5767, BioSure Clean Ice Ozone System
- HS-5734, Side-Breathing Kit
- H9320-51, Single Water Filter Kit

Hoshizaki reserves the right to change specifications without notice.

KM-530MAK

MODULAR CRESCENT CUBER

KM-530MAK
04/28/26
Item #13683K

mm
inch

FRONT VIEW

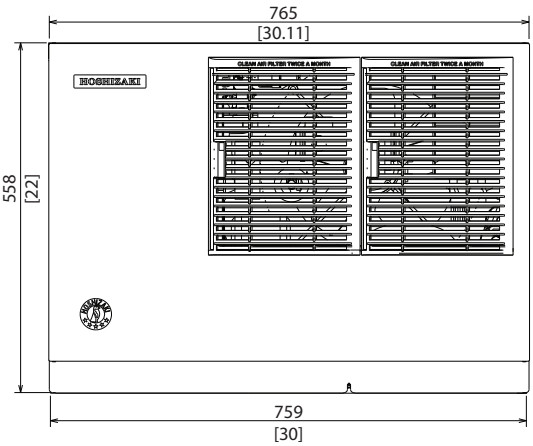

SIDE VIEW

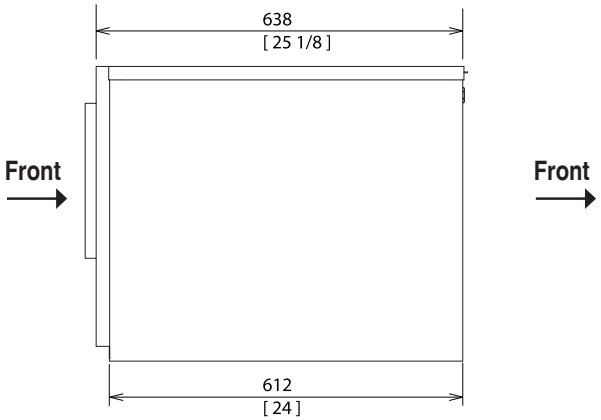

REAR VIEW

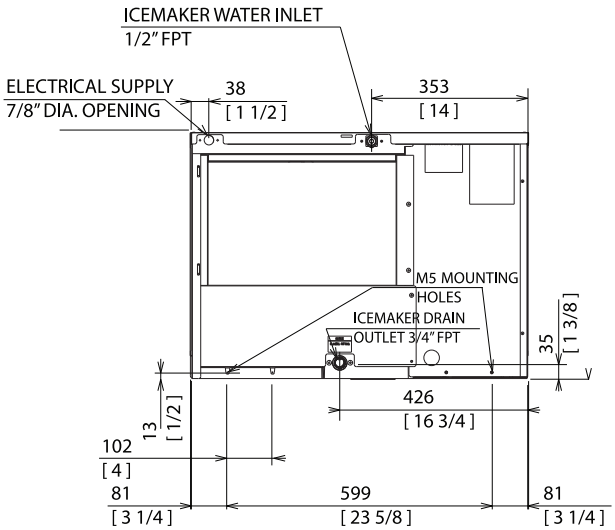
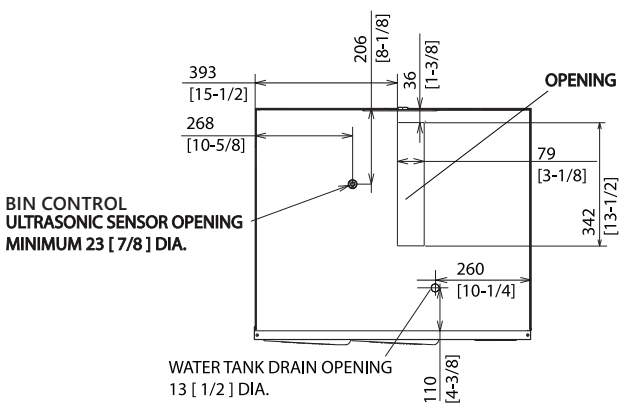
BOTTOM VIEW