KM-830MAK2

MODULAR CRESCENT CUBER

KM-830MAK2
04/23/26
Item # 13232K

Item #: _____

Project: _____

Qty: _____


AIA#: _____

W x D x H
30" x 24 5/8" x 28"



KM-830MAK2
Air-Cooled
Shown on optional
Lancer 30" dispenser

KM*Edge*™ Cube Dimensions†



† approximate size in inches, image not to scale

Features

- **Individual crescent cube**
- **Stainless steel evaporator**
- **Environmentally friendly R290 hydrocarbon refrigerant**

- Up to 777 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- CycleSaver™ design
- EverCheck™ alert system
- Removable air filters

Available on Bins:

B-250SF	**B-700SF**	**B-900SF**	**B-1300SS**	**B-1650SS***
BD-500SF	**B-800SF**	**B-1150SS**	**B-1500SS***	

*Top kit may be required. See Bin Spec Sheets. *Two unit application only.*

Warranty:
3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator.
5 Year Parts on Compressor; air-cooled condenser coil.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 33 1/2" x 33 1/4" x 28" Volume: 18.05ft³

		ICE PRODUCTION		WATER USAGE		ELECTRICAL							
Condenser	**Model**	**Air / Water Temp Lbs. per 24 hours** 70°/ 50°F	90°/ 70°F	**Potable** Gal. per 100 lbs. 90°/ 70°F	**Condenser** Gal. per 100 lbs. 90°/ 70°F	**kWh Used** per 100 lbs. 90°/ 70°F	**Min. Circuit/ Max. Fuse Size**	**Amperage**	**Voltage**	**Circuit Wires** (including ground)	**Heat Rejection BTU/hr.**	**Refrigerant Charge Amount**	**Net / Ship Weight (lbs.)**
Air	KM-830MAK2	777	635	30.0	N/A	4.4	20A	6.4A	208-230V/60/1	3	10,900	10.9 oz.	218 / 240

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187 - 253V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Panels easily removed and all components accessible for service.
- Allow 6" (15cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.

Plumbing

- Icemaker Water Supply Line: Min. 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Min. 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Accessories

- HS-5767, BioSure Clean Ice Ozone System
- HS-2148, Top Kit for DB/DM-200
- H9320-52, Twin Water Filter Kit


Hoshizaki reserves the right to change specifications without notice.

KM-830MAK2


MODULAR CRESCENT CUBER

KM-830MAK2
04/23/26
Item # 13232K


FRONT VIEW

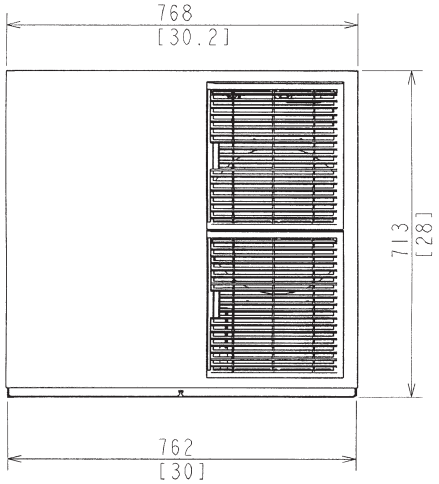


SIDE VIEW

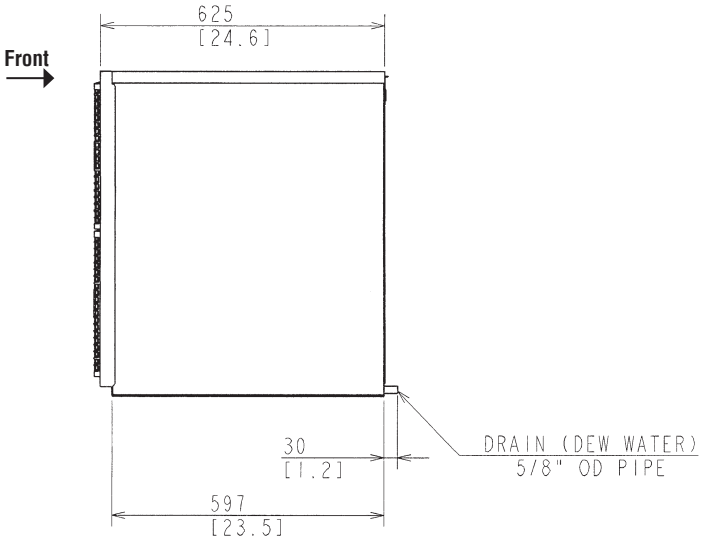

REAR VIEW

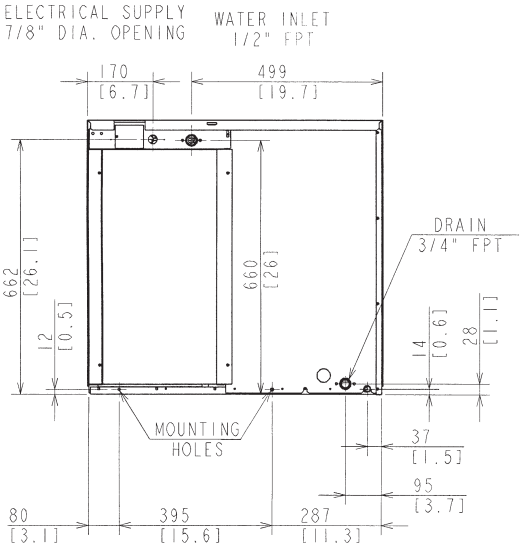

BOTTOM VIEW

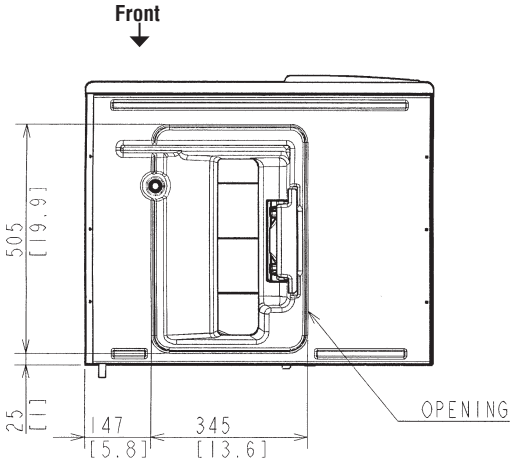

© HOSHIZAKI AMERICA, INC. 618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com